

NARCO

Binding Post Terminal Strips

STANDARD BINDING POST STRIPS

MATERIAL SPECIFICATIONS FOR ALL BINDING POST STRIPS


FIBERGLASS: Reinforced Polyester NEMA
Grade GPO-3 rated for 300°F. (155°C).

GEE: Glass Epoxy, MIL-I-24768/27
Type G-10, Temp. 300°F max. (155°C)


PBE: Paper base electrical, FED. LP-513
Type XP natural, Temp. 250°F max. (121°C)

1/16" THICK MATERIAL 5/8" WIDE

XP PHENOLIC CAT. NO.	GLASS EPOXY CAT. NO.	FIBER-GLASS CAT. NO.	L LENGTH	A MTG. C'TRS.	NO. TERM
4187	4177	4167	1 $\frac{1}{8}$ "	$\frac{1}{8}$ "	1
4188	4178	4168	1 $\frac{3}{8}$ "	1 $\frac{1}{8}$ "	2
4189	4179	4169	2"	1 $\frac{1}{8}$ "	3
4190	4180	4170	2 $\frac{1}{8}$ "	2 $\frac{1}{8}$ "	4
4191	4181	4171	3"	2 $\frac{1}{8}$ "	5
4192	4182	4172	3 $\frac{3}{8}$ "	3 $\frac{3}{8}$ "	6
4193	4183	4173	3"	3"	7
4194	4184	4174	4 $\frac{1}{8}$ "	3 $\frac{3}{8}$ "	8
4195	4185	4175	4 $\frac{1}{8}$ "	4 $\frac{1}{8}$ "	9
4196	4186	4176	5 $\frac{1}{8}$ "	4 $\frac{1}{8}$ "	10

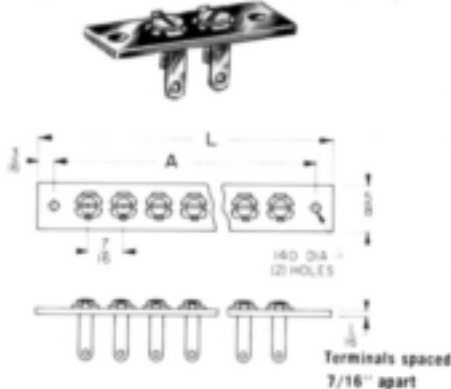

Terminals supplied on these strips

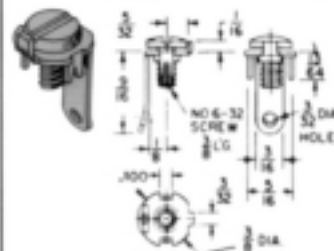


Terminal: .032 Steel-Cadmium Plated.
Screw: Steel, Nickel Plate

CAT. NO. 1248


HEAVY DUTY BINDING POST STRIPS

3/32" THICK MATERIAL 7/8" WIDE

GLASS EPOXY CAT. NO.	FIBER-GLASS CAT. NO.	L LENGTH	A MTG. C'TRS.	NO. TERM
4147	4157	1"	1"	1
4148	4158	2"	1 $\frac{1}{2}$ "	2
4149	4159	2 $\frac{1}{2}$ "	2"	3
4150	4160	3"	2 $\frac{1}{2}$ "	4
4151	4161	3 $\frac{1}{2}$ "	3"	5
4152	4162	4"	3 $\frac{1}{2}$ "	6
4153	4163	4 $\frac{1}{2}$ "	4"	7
4154	4164	5"	4 $\frac{1}{2}$ "	8
4155	4165	5 $\frac{1}{2}$ "	5"	9
4156	4166	6"	5 $\frac{1}{2}$ "	10

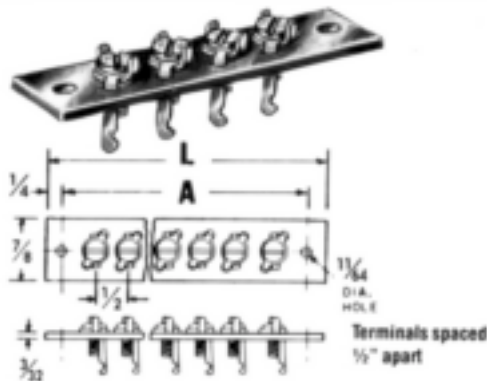

Terminals supplied on these strips

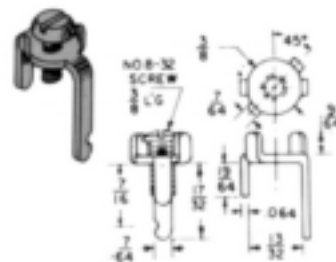

Terminal: .064 Brass-Tin Plated.
Screw: Brass - Tin Plated.

CAT. NO. 1209